


DOUBLE
CHARGE
TILES



Sairam
CERA INTERNATIONAL

600x600 MM

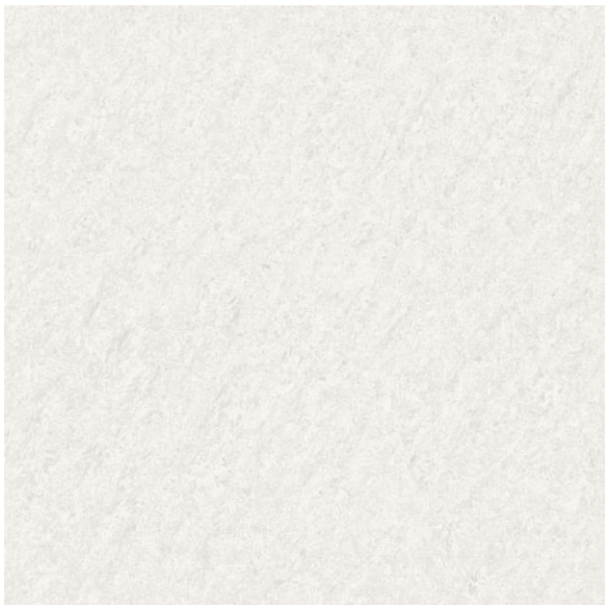

TROPICANA WHITE

600 x 600mm



CRYSTAL WHITE

600 x 600mm



CRYSTAL CREMA

600 x 600mm



CRYSTAL PINK

600 x 600mm



CRYSTAL PISTA

600 x 600mm



CRYSTAL BEIGE

600 x 600mm



CRYSTAL PEARL GREY

600 x 600mm



CRYSTAL NATURAL

600 x 600mm



CRYSTAL ALMOND

600 x 600mm



CRYSTAL COFFEE

600 x 600mm




CRYSTAL GRANITE

600 x 600mm



CRYSTAL RUBBY RED

600 x 600mm

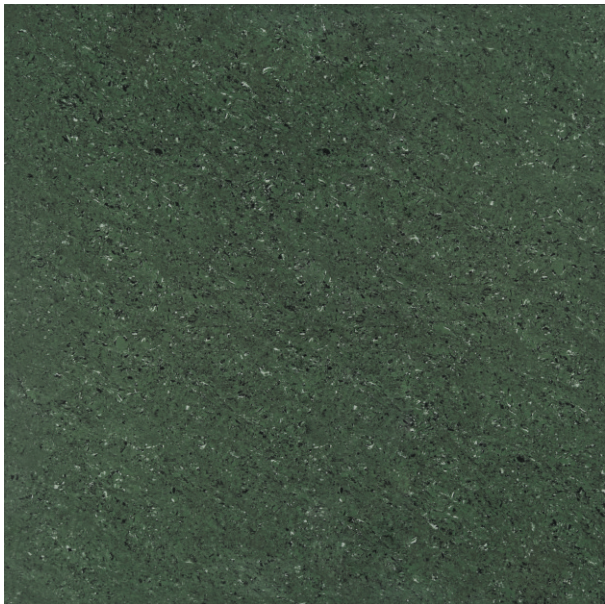


CRYSTAL FOREST GREEN 600 x 600mm



CRYSTAL BLACK

600 x 600mm

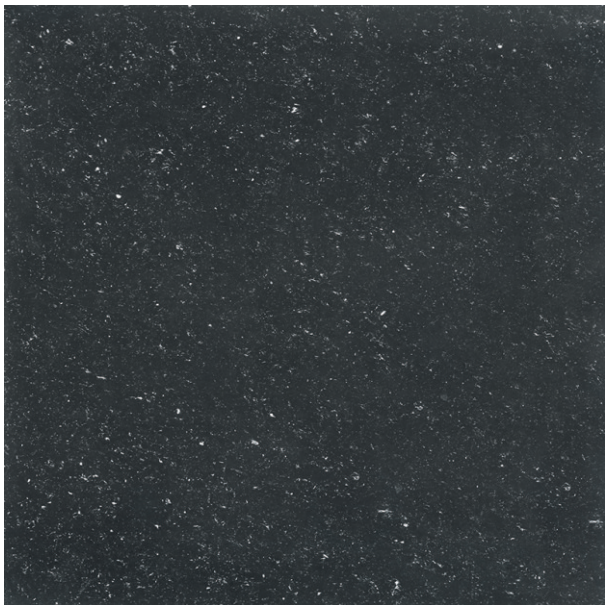

CRYSTAL AQUA BLACK

600 x 600mm



CRYSTAL MAGENTA

600 x 600mm



CRYSTAL ORANGE

600 x 600mm



GALAXY BLACK

600 x 600mm



Sr. No.	Property	International Std. ISO 13006/En 176 Group Bla	Our Value	Method of Testing
1	Deviation in Length	± 0.6%	± 0.1%	EN 98
2	Deviation in Thickness	± 5.0%	± 5.0%	EN 98
3	Straightness of Sides	± 0.5%	± 0.1%	EN 98
4	Rectangularity	± 0.6%	± 0.2%	EN 98
5	Surface Flatness	± 0.5%	± 0.2%	EN 98
6	Water Absorption*	<0.5%	<0.05%	EN 99
7	Mohs hardness*	>6	>8	EN 101
8	Flexural Straightness*	>27 N/mm2	>47 N/mm2	EN 100
9	Abrasion Resistance	<204 mm3	<144 mm3	En 102
10	Skid Resistance (Friction Coefficient)	>0.4	>0.6	ASTM C-1028
11	Breaking Streight*	1113 N	2830 N	ASTM C-648
12	Density (g/cc)	>2	2.4	DIN 51082
13	Frost Resistance	Frost Proof	Frost Proof	EN 202
14	Chemical Resistance	No Damage	No Damage	EN 106
15	Thermal Shock Resistance	No Damage	No Damage	EN 104
16	Colour Resistance	No Damage	No Damage	DIN 51094
17	Thermal Expansion	<9 x 10-6	<6 x 10-6	03 EN 1
18	Stain Resistance	Resistant	Resistant	ISO 10454-14
19	Moisture Expansion	Nil	Nil	ISO 10545-10
20	Glossiness	-	Min 65% - 70% reflection	Glossmeter

EXCLUSIVE APPLICATIONS

